


# SINGLE-PHASE TRANSFORMER FOR CIRCUIT SEPARATION OPEN DRY-TYPE DESIGN CLASS H SERIES 1.1 kV IN ACCORDANCE WITH IEC/EN 61558-2-15 AND RETIE.

Note: the designs are legal property of Nacional de Transformadores S.A.S. - Tesla Transformers due to its registered trademark. The total or partial use of Tesla Transformers' design is prohibited without prior authorization from Nacional de Transformadores S.A.S.

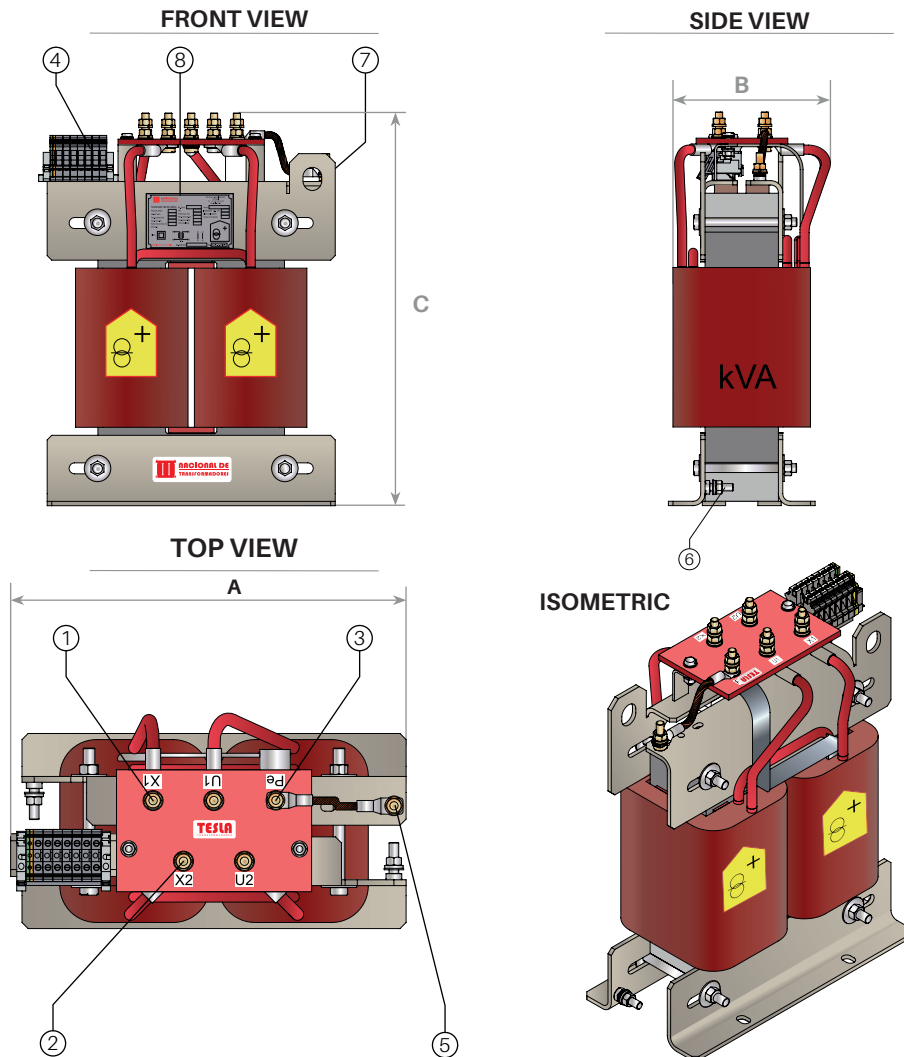

Rated voltage (kV)	1,1
Primary voltage(V)	Up to 1000
Secondary voltage (V)	Up to 250
Phases	1
Installation	Indoor
Frequency (Hz)	60
Connection group	li0
Tap changer	No switching
Temperature rise (°C)	125
BIL (kV)	-/-
Leakage current between secondary and ground (mA)	< 0,5
Service factor (0.5 hours at 90% load) (%)	150
Degree of protection	IP00
Cooling	AN
Insulation class	H

## Constituent parts

- 1 Primary winding phase terminals.
- 2 Secondary winding phase terminals.
- 3 Electrostatic screen terminal.
- 4 Thermal overtemperature protector (PT100 type thermocouple).
- 5 Grounding terminal.
- 6 Screen grounding terminal.
- 7 Lifting device.
- 8 Nameplate..

POWER (kVA)	A (mm)	B (mm)	C (mm)	WEIGHT (kg)	IMPEDANCE AT 145°C (%)	SHORT CIRCUIT DURATION (s)	SYMMETRICAL ICC (kA)	LOAD LOSSES AT 145°C Pk(W)	NO-LOAD LOSSES Po(W)	EFFICIENCY 75°C (*) (%)	SOUND PRESSURE POWER (***) (dB)
0,5	260	200	410	35	3	2	33,3	25	15	90,92	<50
1	280	200	410	40	3	2	33,3	40	25	92,35	<50
2	300	200	420	45	3	2	33,3	80	30	94,86	<50
3	330	200	430	50	3	2	33,3	95	35	95,94	<50
4	330	200	450	55	3	2	33,3	120	38	96,56	<50
5	330	200	470	60	3	2	33,3	160	40	96,91	<50
6	340	200	470	65	3	2	33,3	200	45	97,00	<50
8	340	200	480	70	3	2	33,3	250	47	97,50	<50
10	340	200	480	75	3	2	33,3	350	50	97,64	<50

(\*) Efficiency levels calculated at a reference temperature of 75°C, with a load factor of 50% and power factor = 1.  
 (\*) Prior to the guaranteed efficiency value, the specified no-load or winding losses are a reference and these may vary depending on the voltage and current characteristics of the transformer.  
 (\*\*\*) Sound pressure level NTC 5978.  
 (\*\*\*) The different constructions vary by power (kVA).  
 (\*\*\*\*) The number of perforations on the terminals is according to the manufacturing standard (It will be indicated in the final drawing).

## Notes

- Due to changes in technology and manufacturing methods, dimensions and weights may change without prior notice, tolerances  $\pm 10\%$ .
- The values of No-load losses and load losses are values determined according to the design and kVA.
- For special transformers, K factor for harmonic management, IP protection grades, reduced temperature rise in the windings on request with additional cost.
- Measurements are approximate, for definitive plans check with the factory.
- The measurements are approximate for final plans check with the factory.
- For different or higher powers, they are manufactured to order, check with the factory.